


ECP-ISO
ECP ISOLATOR

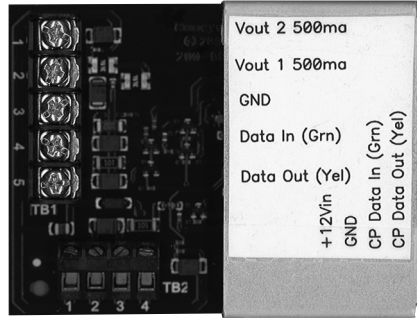

The ECP Isolator is designed to isolate burglary devices from fire devices on the ECP bus, so that a trouble on the burglary side of the bus will not affect the operation of fire

devices. It can also be used in any system to prevent wire shorts or grounds from interfering with operation on another wired branch on the bus.

FEATURES

- Helps to maintain the operation of near-side isolated equipment such as fire keypads and communicators in the event of shorts or grounds on the extended ECP bus.
- Required for commercial fire alarm systems installed as combination fire/burglary systems, or other high-security applications where isolation is required.

SPECIFICATIONS

Mounting:

- Mount inside the control panel enclosure

Compatibility:

- VISTA-32FBP
- VISTA-128FBP
- VISTA-250FBP
- FA1670C
- FA1700C

Product Dimensions:

- 3" W x 2-3/4" H x 1" D

Power:

12VDC nominal

Temperature:

- 32° F to 122° F (0° C to 50° C)


Humidity:

- 0-86% non-condensing

Listings:

- Listed to UL864 9th Edition

Product specifications subject to change.

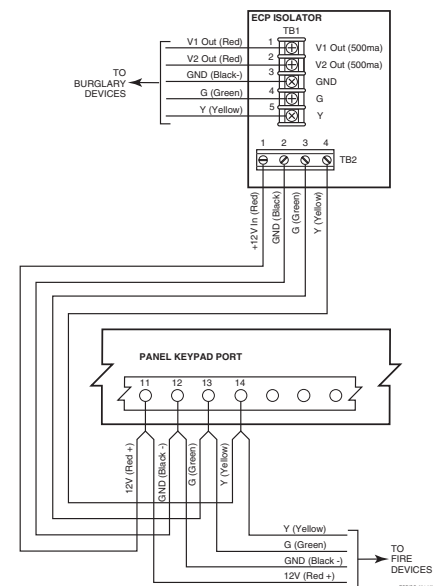

ORDERING

ECP-ISO

ECP Isolator

For more information: www.honeywell.com/security/hsc

Automation and Control Solutions

Honeywell Security & Communications
2 Corporate Center Dr. Suite 100
Melville, NY 11747
1.800.467.5875
www.honeywell.com

L/ECPI/D
September 2009
© 2009 Honeywell International Inc.

Honeywell